

CLADDING
BY ENCORE




INTERLOK

Interlok, a modern wall cladding solution that enhances a sleek and organized appearance while offering the versatility to be applied in both extended and compact horizontal and vertical configurations. This system employs a tongue and groove mechanism to establish a robust concealed interlocking joint among the cladding panels. Interlok serves as an effective wall cladding system suitable for residential and commercial uses. A streamlined flat façade with hidden fixings, creating a distinct “shadow line” effect between the panels.

www.encoresheetmetal.com.au


ENCORE
SHEET METAL

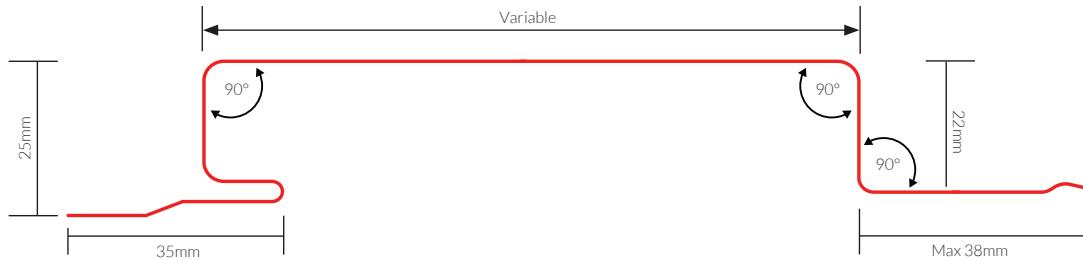

Non-combustible metal cladding profile
 Versatile design and install options available
 Streamlined and flat façade aesthetic with concealed fixings
 Suitable for wall cladding and soffit only
 Pronounced “shadow line” effect between panels

Key Benefits

- Suited for residential and commercial wall cladding applications
- Custom panel widths available to suit design requirements
- Flexibility with customising recess width
- Minimal maintenance compared to other building materials
- Smooth contemporary profile with no visible fixings
- Can be applied to a curved wall application
- Ability to taper panels
- Allows for building expansion and contraction

Coverage Distance (mm) 200mm, 300mm *Most economical width*

Metal Thickness (mm) 0.55mm

Panel Height (mm) 25mm

Panel Length (mm) 1000mm Min.

Panel Tolerance (mm) Sheet length: +/- 7mm
 Covering width: +/- 4mm

Thermal Expansion 2.9mm increase on average for every 5m at 50°C change in temp.

Minimum Roof Pitch Not suitable for roofing

Technical Support

Encore Sheetmetal are here to help you. We can manufacture and provide everything that is required to complete your project from our cladding profiles, to all the associated accessories and flashings.

For further information or support with flashings please contact us. As every architectural project is different and you require custom advice, we can discuss your project specifications and will work with you to fabricate to your individual requirements.

This product has been tested in accordance with Australian Standard AS 4040.2-1992 - "Method of testing sheet roof and wall cladding for non-cyclonic regions" and therefore satisfies AS/NZS 1562.1:1992 Design & Installation of sheet roof and wall cladding - metal. Fire compliance and combustibility certification

For further information please contact us.